



ABF Filters

Automatic self-cleaning filters
for high loads of suspended
solids and heavy duty
applications



flowrates

**up to 7200 m³/h
(32000 gpm)**

filtration degrees

3500-200 micron

water for cleaning

**less than 1%
of the total flow**

minimum operating
pressure

2 bar (30 psi)

features:

- Heavy duty filter for high loads of suspended solids and high flowrates
- Durable electrically driven revolving-brush cleaning mechanism
- Automatic flushing according to pressure differential and/or time
- Option for continuous flushing
- Low pressure operation, suitable for 2 bar (30 psi) and lower
- No interruption of downstream flow during flushing
- Applications: Water supply systems, cooling water, wastewater treatment
- Industries: manufacturing, mining, water and wastewater treatment plants, turf, agriculture, etc.

How the ABF Strainers Work

General

Amiad's ABF Series consists of heavy duty automatic filters with an electric self-cleaning mechanism. The five models of the "ABF" product line range in flow-rates of up to 7200 m³/h (32000 gpm) with screens ranging from 3,500-200 micron filtration degree.

The Filtering Process

Raw water enters the inside of the screen-cylinder (1) from the filter's Inlet (2) and flows through the screen to the filter's Outlet (3). The dirt particles are trapped on the inner screen surface and formulate a "filtration cake" that causes a differential pressure across the screen.

The Self-Cleaning Process

During the self-cleaning process, filtered process water continues to flow. The Exhaust Valve (4) opens and the Drive Unit (5) rotates two stainless steel brushes (6) which sweep the inner surface of the cylindrical screen. The particles trapped on the screen are dislodged by the brushes and flushed out the exhaust valve.

The Control System

The control system is comprised of a Pressure Differential Switch (7) that senses the pressure differential across the screen and sends a signal to the control board when it reaches a pre-defined value (usually 0.5 bar/7 psi). The control board initiates the self-cleaning process.


The filter begins a self-cleaning cycle under any one of the following conditions:

1. Receiving a signal from the Pressure Differential Switch
2. Time interval parameter set at the control board
3. Manual Start

"ABF" Models

Amiad's "ABF" product-line consists of the following models:

- ABF-3000 for up to 150 m³/h (660 gpm)
- ABF-6000 for up to 700 m³/h (3100 gpm)
- ABF-10000 for up to 1000 m³/h (4400 gpm)
- ABF-15000 for up to 1800 m³/h (8000 gpm)
- Mega ABF 40000 up to 4000 m³/h (17600 gpm)
- Mega ABF 60000 for up to 7200 m³/h (32000 gpm)

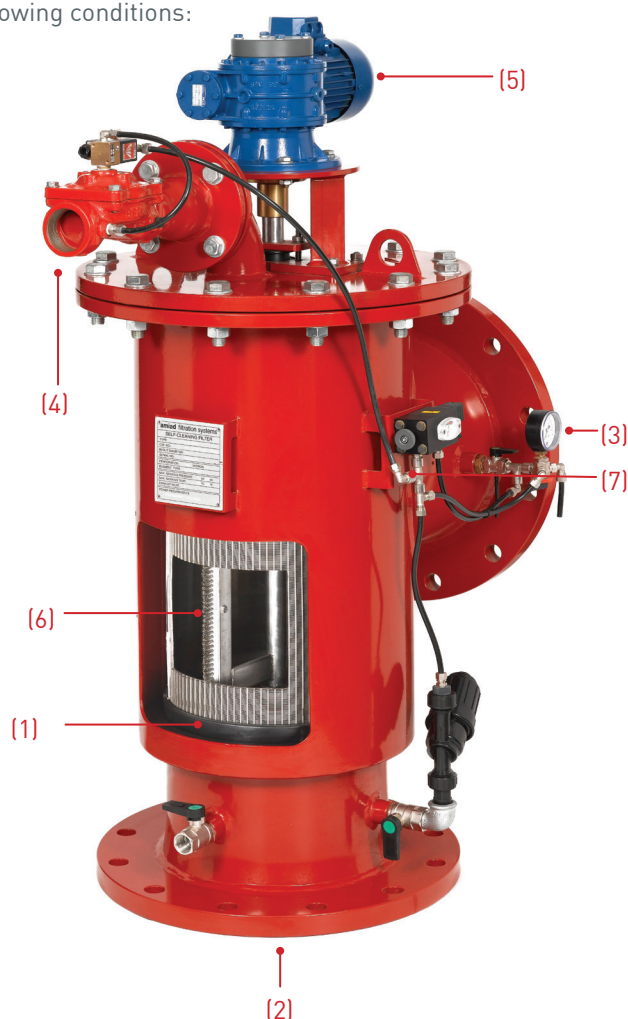

Technical Specifications

Filter Type	ABF-3000	ABF-6000	ABF-10000	ABF-15000	Mega ABF 40000	Mega ABF 60000
-------------	----------	----------	-----------	-----------	----------------	----------------

General Data						
Maximum flowrate*	150 m³/h (660 gpm)	700 m³/h (3100 gpm)	1000 m³/h (4400 gpm)	1800 m³/h (8000 gpm)	4000 m³/h (17600 gpm)	7200 m³/h (32000 gpm)
Inlet/Outlet diameter	3"-6" (80-150 mm)	8"-14" (200-350 mm)	8"-16" (200-400 mm)	14"-20" (350-500 mm)	16"-28" (400-600 mm)	20"-36" (500-900 mm)
Standard filtration degrees	Perforated screen 3500, 2500, 1500, 800 micron Wedge Wire Screen 800, 500, 300, 200 micron					
Min. working pressure	2 bar (30 psi) 1 bar (15 psi) upon request					
Max. working pressure	10 bar (145 psi) 16 bar (232 psi) upon request					
Max. working temperature	60°C (140°F) 95°C (203°F) upon request					
Electrical Supply	230/480 VAC					
Weight [empty]	110 kg (245 lb)	213-260 kg (470-573 lb)	310-380 kg (683-838 lb)	650 kg (1430 lb)	2250 kg (4960 lb)	6200 kg (13670 lb)

Flushing Data				
Minimum flow for flushing	30 m³/h (132 gpm)		70 m³/h (300 gpm)	70-140 m³/h (300-600 gpm)
Reject water volume per flush cycle	150 liter (40 gallon)	200 liter (53 gallon)	300 liter (80 gallon)	1200 liter (317 gallon)
Flushing cycle time	15 seconds	15-30 seconds At 60 Hz		4 x 15-30 seconds
Exhaust valve	2" (50 mm)		3" (80 mm)	4 x 3" (80 mm)
Flushing criteria	Differential pressure of 0.5 bar (7psi), time intervals and manual operation			

* Consult Amiad for optimum flow depending on filtration degree & water quality.

Technical Specifications

Filter Type	ABF-3000	ABF-6000	ABF-10000	ABF-15000	Mega ABF 40000	Mega ABF 60000
-------------	----------	----------	-----------	-----------	----------------	----------------

Screen Data						
Filter area	3000 cm ² (465 in ²)	6000 cm ² (930 in ²)	10000 cm ² (1550 in ²)	15000 cm ² (2325 in ²)	40000 cm ² (6200 in ²)	60000 cm ² (9300 in ²)
Screen types	316 St. St. wedge wire 316 St. St. perforated screen					

Control and Electricity						
Rated operation voltage	3 phase, 380/440V, 50/60Hz					
Electric motor	¼ HP Gear Output 14 RPM	¾ HP Gear Output 18 RPM	1 HP Gear Output 22 RPM	1.5 HP Gear Output 18 RPM	4 x 1 HP Gear Output 22 RPM	4 x 1.5 HP Gear Output 18 RPM
Current consumption	0.7 Amp.	1.5 Amp.	2.5 Amp.	3.0 Amp.	2.5 Amp.	3.0 Amp.
Control voltage	24 VAC					


Construction Materials*						
Filter housing and lid	Epoxy or Polyester coated carbon steel 37-2					
Cleaning mechanism	Stainless steel 316L, PVC, Acetal					
Exhaust valve	Epoxy-coated cast iron, Natural rubber					
Seals	Synthetic rubber, Teflon					
Control	Brass, Stainless steel, Nylon					

* Amiad offers a variety of construction materials. Please consult us for specifications.


ABF 3000




Typical Installation Drawing

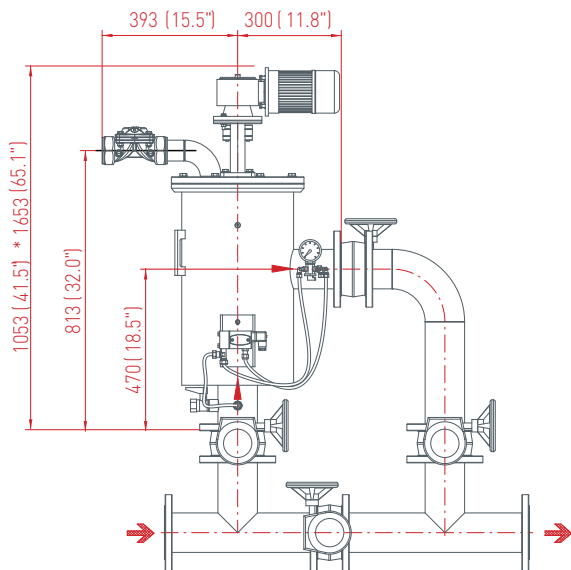

ABF 6000

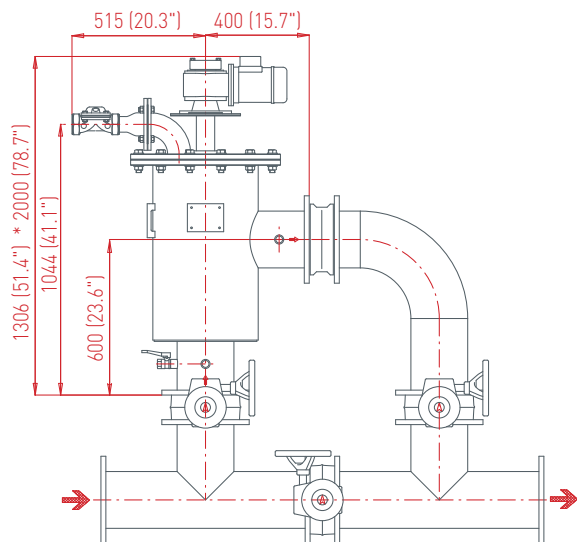

ABF 10000

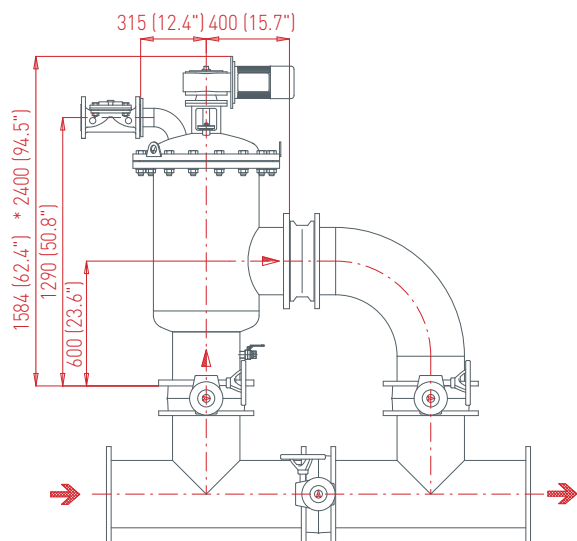


Dim: mm (inch)
*Approx. length required for maintenance



ABF 15000





Typical Installation Drawing

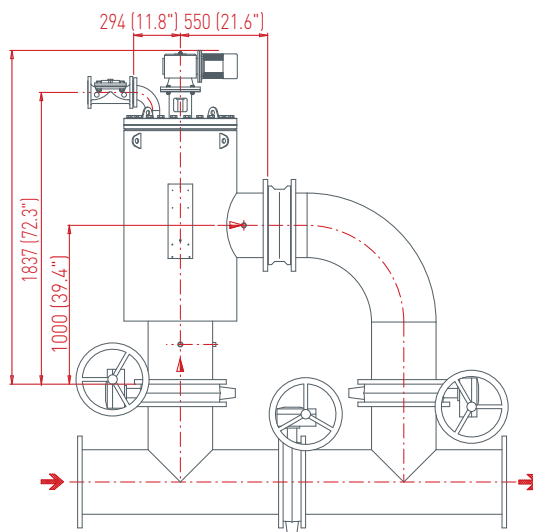

MEGA ABF 40000

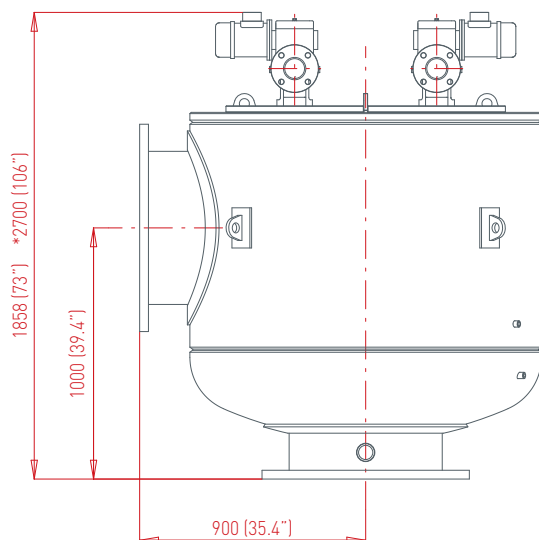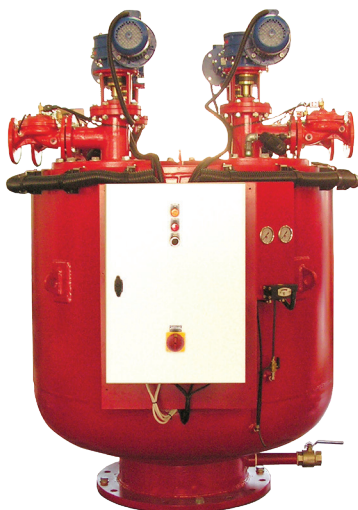

MEGA ABF 60000

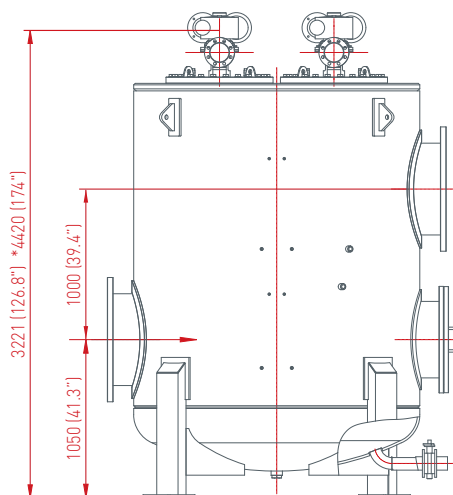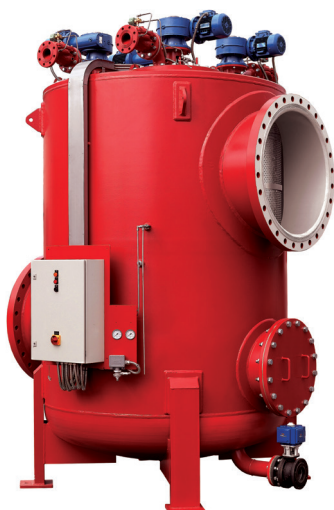


Dim: mm (inch)


*Approx. length required for maintenance

Head Loss Graphs
in clean water


ABF 3000

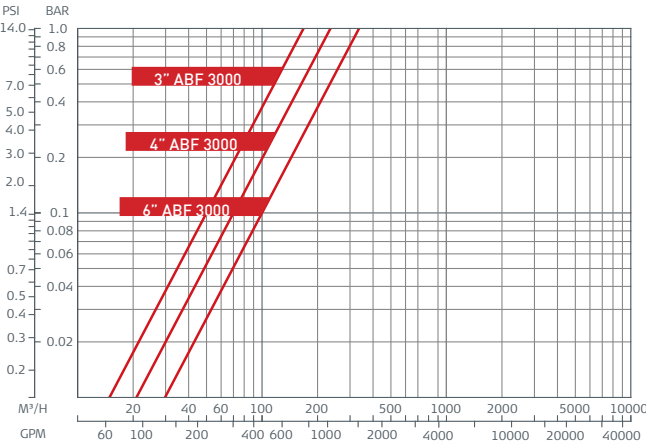


ABF 6000

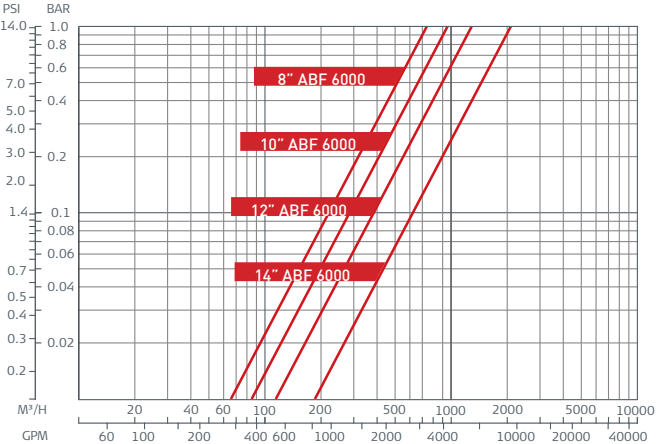


ABF 10000

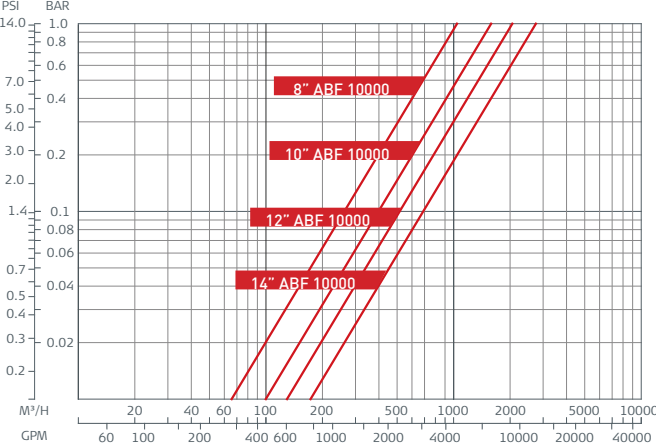


ABF 15000

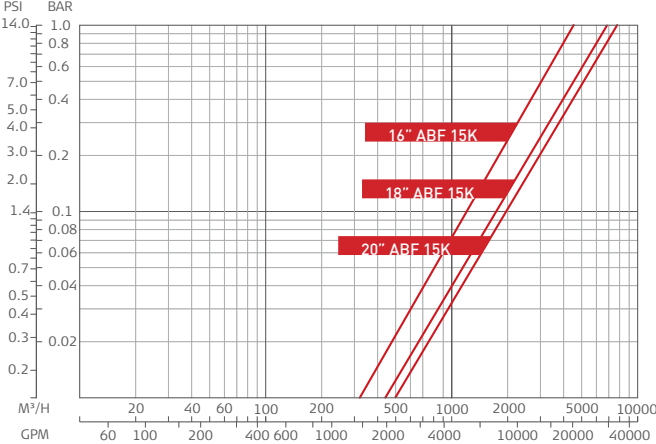

MEGA ABF 40000

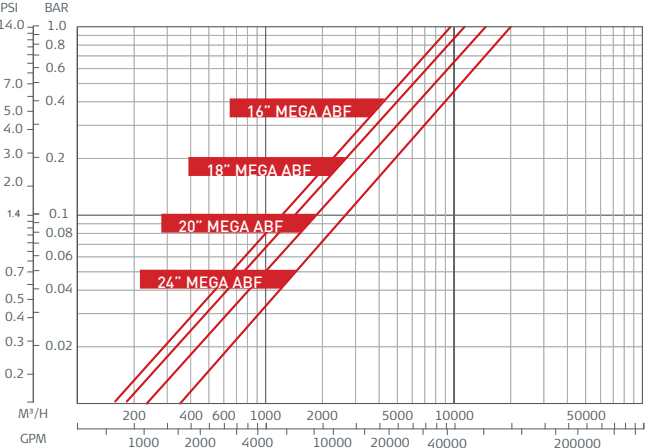

MEGA ABF 60000

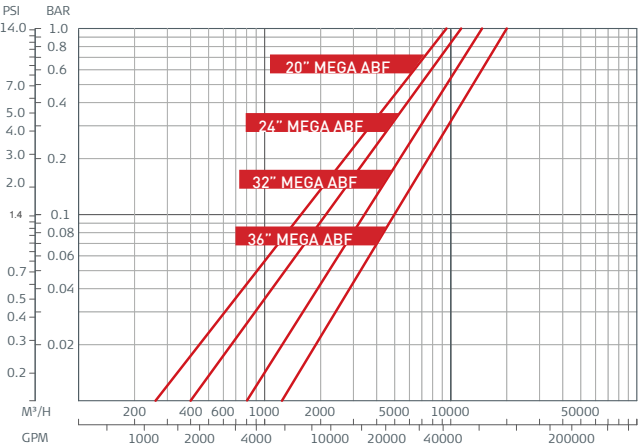

Headquarters

Amiad Water Systems Ltd.

Web: www.amiad.com | E-mail: info@amiad.com

The Americas



USA

Amiad USA Inc.

Web: www.amiadusa.com | E-mail: infousa@amiad.com

Brazil

Amiad Sistemas de Água Ltda.

E-mail: infobrasil@amiad.com

Mexico

Amiad México SA DE CV,

Web: www.amiad.es | E-mail: infomexico@amiad.com

Irrigation office: E-mail: infomexico-irr@amiad.com

Asia



India

Amiad Filtration India Pvt Limited

Web: www.amiadindia.com | E-mail: info-india@amiad.com

China

Amiad China (Yixing Taixing Environtec Co., Ltd.)

Web: www.amiad.com.cn | E-mail: infochina@amiad.com

South-East Asia

Filtration & Control Systems Pte. Ltd.

E-mail: info-singapore@amiad.com

Australia



Amiad Australia Pty Ltd.

Web: www.amiad.com.au | E-mail: sales@amiad.com

Europe



Amiad Water Systems Europe SAS

E-mail: industry-europe@amiad.com

German branch office

E-mail: industry-de@amiad.com

United Kingdom

Amiad Water Systems UK Limited

E-mail: info-uk@amiad.com

ozgjobalb2b.com



www.amiad.com

910101-000190/05.2019

Copyright © 2013 Amiad Water Systems Ltd. All rights reserved. The contents of this catalogue including without limitation all information and materials, images, illustrations, designs, icons, photographs, graphical presentations, designs, literary works, data, drawings, slogans, phrases, names, trademarks, titles and any other such materials that appear in this catalogue (collectively, the "Contents") are the sole property of Amiad Water Systems Ltd. ("Amiad"). Amiad has sole and exclusive right, title and interest in the Contents, including any intellectual property rights, whether registered or not, and all know-how contained or embodied therein. You may not reproduce, publish, transmit, distribute, display, modify, create derivative works from, sell or participate in any sale of, or exploit in any way, in whole or in part, any of the Contents or the catalogue. Any use of the catalogue or the Contents, other than for personal use, requires the advanced written permission of Amiad.